

Axis^{AX}

Intelligent CO Detector and Sounder Base

The Intelligent CO Detector and Sounder Base (45681-800ADV) is an analog/addressable combination carbon monoxide (CO) detector for use with Advanced fire alarm control panels. In addition to carbon monoxide monitoring, the CO detector and sounder base can accommodate any Advanced intelligent smoke, heat, or multi-sensor detector. For stand-alone CO detection, blank covers are available in low profile (45681-292) and high profile (45681-380) formats.

The built in sounder of the Intelligent CO Detector and Sounder Base base, can provide either a temporal 3 (fire alarm event) or temporal 4 (CO event) signal, with the fire alarm event having the highest priority. The sounder base requires a separate regulated 24 VDC supply whether from an Axis^{AX} Notification Appliance Circuit (NAC) or from a Listed, supervised, power supply. In addition, common area sounder synchronization is possible with the MB-SDRT-SM, Synchronization Module.

The CO sensor is an electrochemical sensor that is able to detect three levels of carbon monoxide and has a life of approximately six years, in normal environmental conditions. The CO sensor is fully supervised and provides a signal for field replacement once it has reached its end of life cycle.

The Intelligent CO Detector is individually addressed utilizing segments 1-7 of an integral DIP switch. In addition, the optional intelligent smoke, heat, or multi-sensor detector is individually addressed through the base, by a patented address ("XPerT") card. The address is quickly and easily set by removing "pips" on the XPerT card according to a chart supplied with each base.

In addition to an automatic daily test of the Intelligent CO Detector by the fire alarm control panel, the CO Detector can be manually tested locally, via an on-board test button, by spraying CO test gas through its outer edge opening, or by manually initiating a test command from the fire alarm control panel.

The Intelligent CO Detector and Sounder Base is designed as a 6" diameter base which can be mounted to a standard 4" octagonal or 4" square electrical box.



Unique Features:


- Sounder Base CO and Alarm Temporal Patterns
- Built-in Dedicated Microprocessor
- UL 2075 & 2034 CO Monitoring Levels
- Automatic & Manual CO Detector Testing
- Sub-Addressing of Sounder Base
- Integral Red Status LED

Features:

- Standalone CO Detection or Multi-Detection Capability
 - Multi-Detection available w/optional Intelligent Photo, Ion, Heat or Multi-Sensor Detector
- Superior Rejection of Transient Signals
- Optional Blank Covers for Standalone Operation
- 100% Digital Communication Protocol
- Integral XPerT Card Addressing for Optional Detector
- Detector to Base Locking Mechanism

Listings and Approvals:

- ETL ANSI/UL 864 Listed: 101564744NYM-001
- UL268, 217, 2034, 2075: S2829

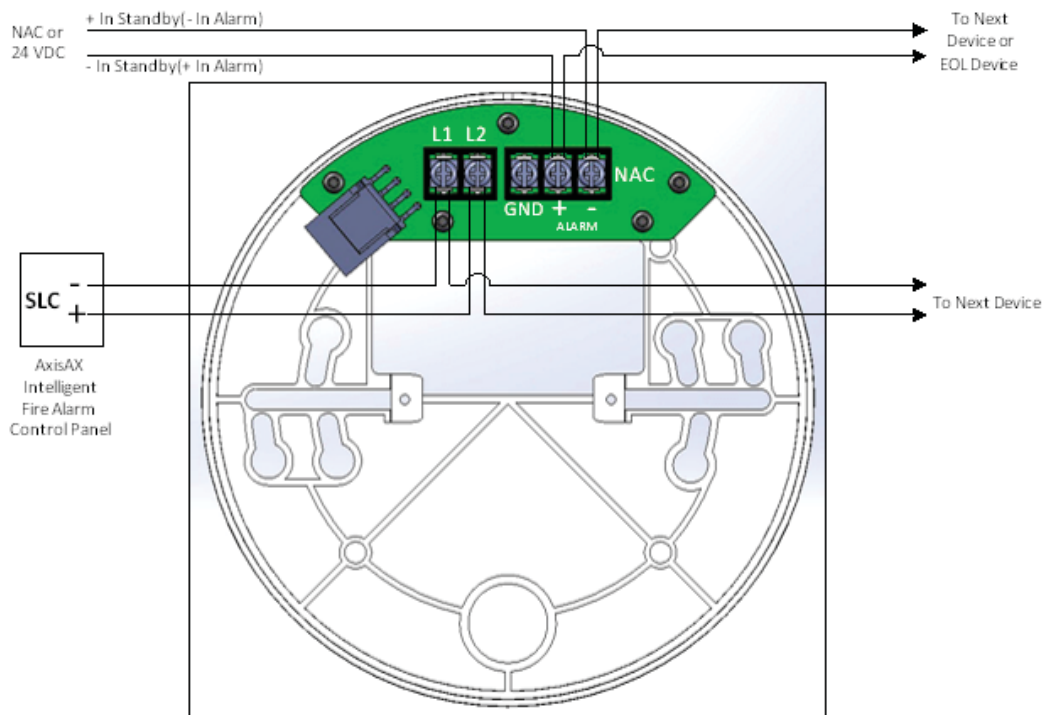

Carbon Monoxide Levels (PPM) (Applicable National Standard)	Alarm Response Time (Time Weighted Average)
70 parts per million (UL 2075 / 2034)	Within 4 Hours
150 part per million (UL 2075 / 2034)	Within 50 minutes
400 parts per million (UL 2075 / 2034)	Within 15 minutes

Ordering Information

45681-800ADV	Intelligent CO Detector and Sounder Base
45681-292	Low Profile Blank Cover
45681-380	High Profile Blank Cover
MB-SDRT-SM	Synchronization Module

* Refer to Intelligent Detector data sheets for specific information regarding optional detectors.

Intelligent CO Detector & Sounder Specifications

Voltage	24 VDC, UL864 Regulated
SLC Loop Current	
Quiescent	0.4 mA
Alarm	0.7 mA
w/LED's	3.5 mA
Sounder 24 VDC Current	
Quiescent	0 mA
Surge Current	33 mA
Sounder Audible Intensity	75 / 85dB @ 10 Feet
Wiring	Solid or Stranded; #12 to #22 AWG Terminals
Environment	Indoor, Dry
Operating Temperature	32-122° F (0-50° C)
Humidity	10-85% (non-condensing/non-freezing)
Material	Makrolon 6455 or 6555; 94V-0
Dimensions	6" Diameter x 1.6" H

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

 Advanced



AIRPLUS
Industrial

www.airplusindustrial.ca 604-882-8886