




Often fire alarm applications call for LED type annunciation, and in some cases, control functionality located remotely from the fire alarm control panel. In these circumstances, it is essential that the annunciator be fully supervised, adequately protected in a locked enclosure and be attractive in appearance. With these requirements in mind, Advanced developed its CAX-LZACAB series of enclosures

The CAX-LZA-CAB series enclosures provide superior flexibility and customization to an Axis AX Series Intelligent Fire Alarm Control Panel installation, the enclosures (CAX-LZA-CAB1 and CAX-LZA-CAB2) provide for remote usage of Advanced switch LED modules, CAX-ASW-16, CAX-I/O-48, CAX-LED16RY, CAX-LED32R and CAX-LED32Y. Available in two (2) configurations, cabinet styles 1 and 2, and four (4) model types for gray and red color, the AX-LZA-CAB series enclosures can accommodate any remote LED annunciation and/or control requirement.

The CAX-LZA-CAB1 Local Zone Annunciator Enclosure is designed to hold a single Advanced switch LED module.

The CAX-LZA-CAB2 Local Zone Annunciator Enclosure is designed to hold up to two Advanced switch LED modules. Within this enclosure, modules can be mixed and matched to suit the installation application.

The CAX-LZA-CAB1 and CAX-LZA-CAB2 enclosures are designed to be surface or semi-flush mounted with optional trimming (CAX-LZA-CAB1-TR or CAX-LZA-CAB2-TR). In addition, the enclosures can also be mounted to a 4" double gang electrical box and are available in either red or gray color.

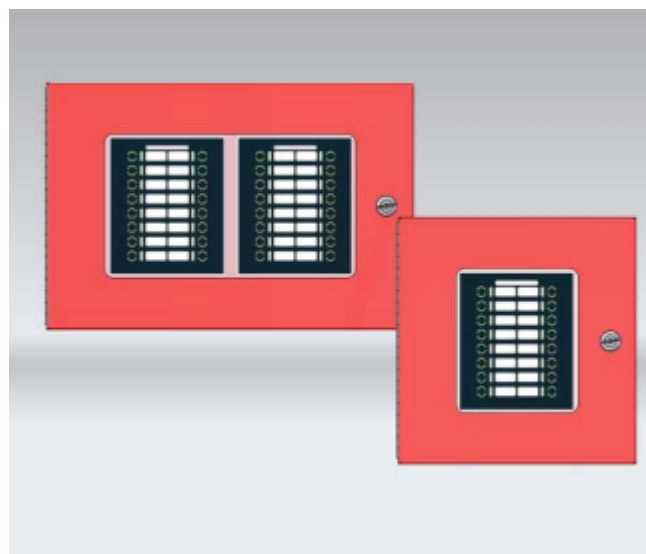


Features

- Compact, Attractive Appearance
- Keyed (CAT30) to match Axis AX Series FACP
- Designed for Remote System Annunciation & Control
- Locked Hinged Front Door Access
- Easy to Install
- Surface or Semi-Flush Mounting
- 16 Gauge Steel Construction
- Available in Red or Gray Color
- Four (4) 5/8" Knockouts
- Optional 4" Double Gang Electrical Box Mounting

Listings and Approvals

- CAN/ULC-S527-11 & CAN/ULC-S559-04 Listed:
100780709NYM-001

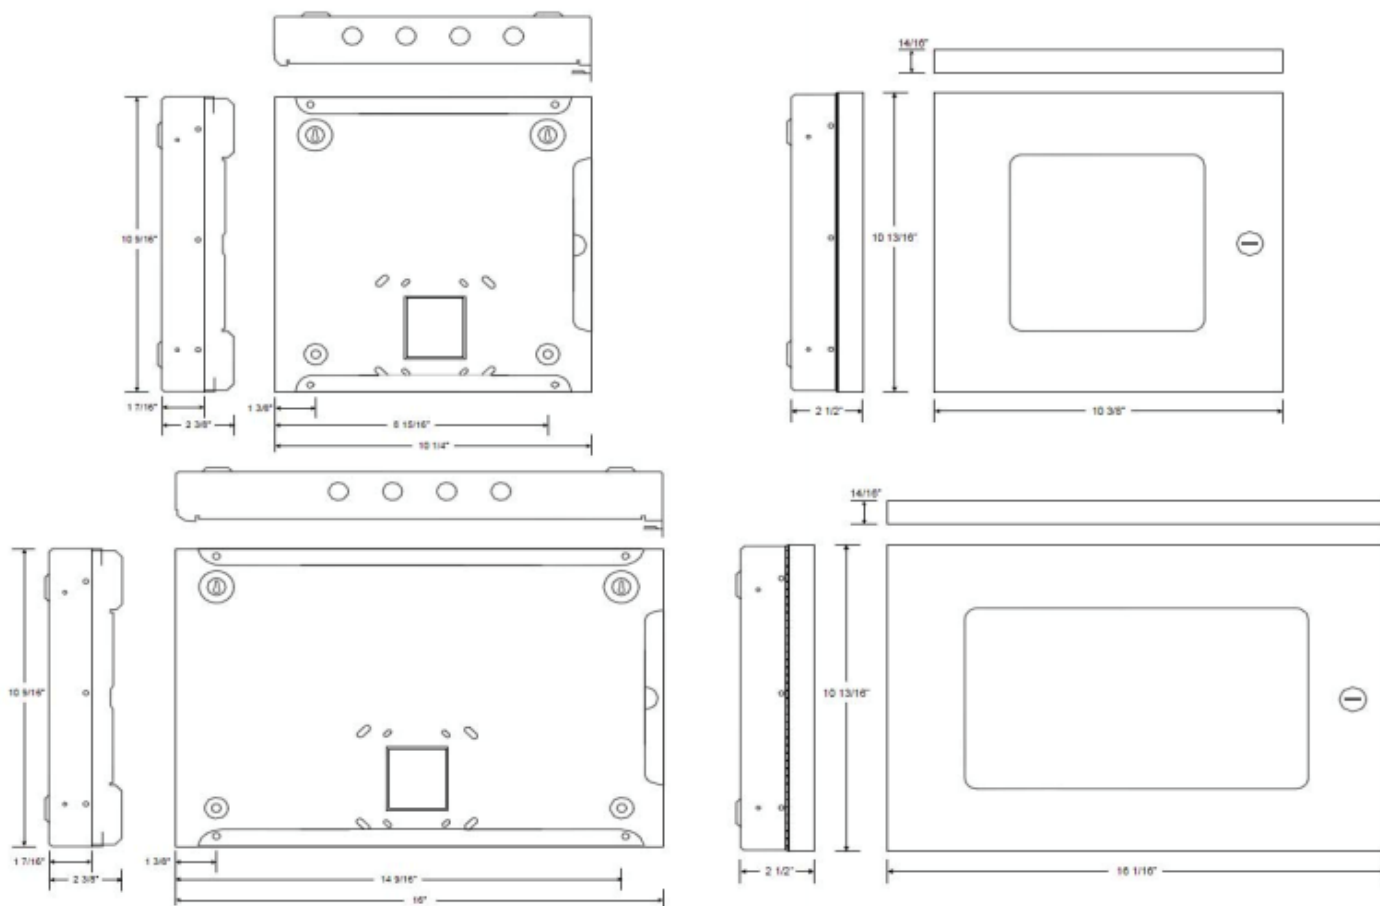

Order Codes and Options

CAX-LZA-CAB1	Single Aperture, Local Zone Annunciator Enclosure
CAX-LZA-CAB2	Dual Aperture, Local Zone Annunciator Enclosure
	Options
CAX-LZA-CAB1-TR	Semi-Flush Mount, Local Zone Annunciator CAB1, Trim Ring
CAX-LZA-CAB2-TR	Semi-Flush Mount, Local Zone Annunciator CAB2, Trim Ring

* For gray enclosure, add the suffix "G" to the part number.

[Check if this document is up to date](#) | [Give us feedback](#)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.